


Motor


The SilenTrac motor by Current Luxury is available with either Zigbee or FM protocol. The primary motor contains patent pending electronics and software to control single or dual tracks. In a dual setup, users will have either one primary and one secondary motor or, in some instances, two secondary motors and one sensor box.

DIMENSIONS & WEIGHT

Primary Motor (with Control Board)

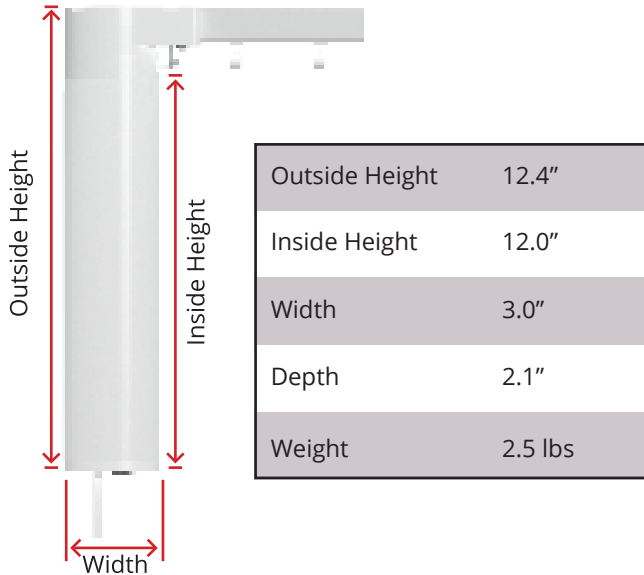

Secondary Motor (no control board)

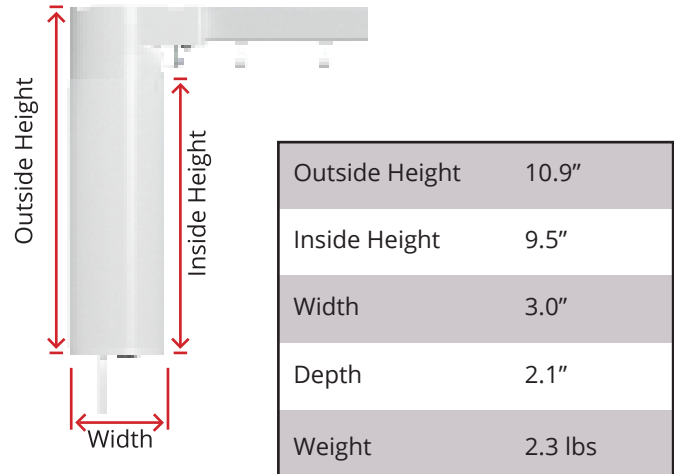

MOTOR INFORMATION

Type	36mm
Voltage	Rated: 12v
Max Torque	28 in-lbs
Average linear speed	Power dependent (12v = 1.63 sec/ft)
Certifications	FCC, IC, CE
Max Current	4A
Power Consumption	~4.8W
Sound level	32.8 dB*

COMMUNICATION PROTOCOL

Zigbee	802.15.4
FM	434.625 MHz 2FSK

POWER

Alkaline	6 or 8 D Cell
Rechargeable	7.4v Li-Ion or 11.1v Li-Ion (solar and standard charging available)
Low Voltage	9v Wall Plug or 12v Wall Plug
Hardwired (power & Control)	CAT5e or CAT6

*as tested in-house by Current Luxury